

"1+" or "3"

Notification No.: 1008

Test Report No.:

28240344 001

Order No.:


93356030

Page 1 / 3

Client:

JIANGSU ZHONGTIAN TECHNOLOGY CO., LTD.

No. 4 Zhongtian Road, Hakeu Town, Budaq County, 222400 Jiangsu Province, China

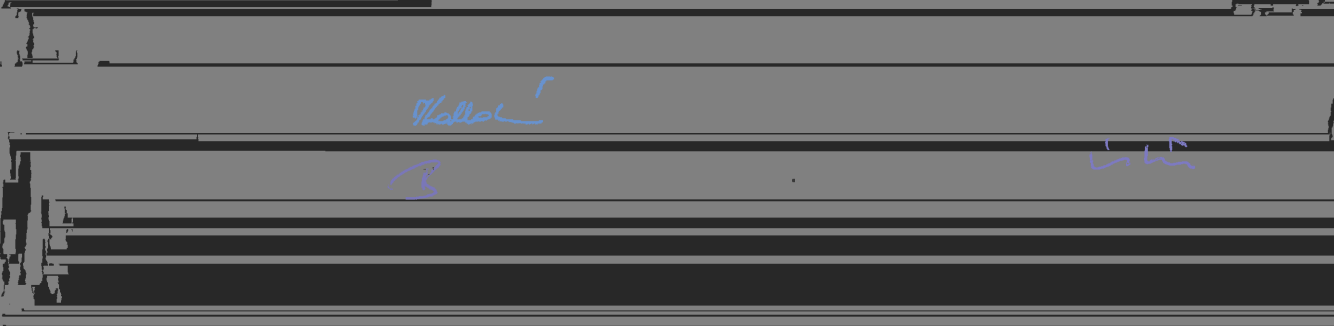

Harmonised standard: EN 50575:2014 + A1:2016

Classification standard: EN 13501-6:2014

Throughout this report a comma is used as the decimal separator.

Abbreviations: ok / P = passed
fail / F = failed

data / D = publication of data

data / D = publication of data

www.tuv.hu

EN 60332-1-2

Clause	Requirement + Test	Result - Remark	Verdict
ZTT GJFJV-4F 7.0mm (ZTT 0774)			
5	Procedure		
	Sample length (600 ± 25 mm).....	615	P
	Approx. outer diameter (mm).....	7,0	
	Flame application time (s).....	60	P
6	Evaluation of test results		
	Not damaged area from lower edge of the top support (min. 50 mm).....	337	P
	Damaged area from lower edge of the top support	495	D

Test Type: **Test for vertical flame propagation for a single insulated wire or cable
1 kW pre-mixed flame**

Standard: **EN 50575:2014 + A1:2016 EN 13501-6:2014**

EN 60332-1-2:2004 + A1:2015, EN 60332-1-1:2004 + A1:2015

No. of samples: 1

Ambient temperature: 26,5 °C

Date of test: 2017.08.07.

Classification according to EN 13501-6: **E_{ca}**

Photo documentation



Before test

After test

Measuring equipment list

Device	Manufacturer	Type	Identification No.	Next calibration
Measuring tape	Stabila	DM 30M	502500	2019.03.31
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]

-END OF TEST REPORT-